



RWY	DIRECTION	THR	BEARING STRENGTH
01	014°	29° 35' 53" N 35° 00' 48" E	PCW mppл/F/A/·/¢ Asphalt , Flexible
19	194°	29° 37' 26" N 35° 01' 21" E	PCW mppл/F/A/·/¢ Asphalt , Flexible

ELEVATIONS AND DIMENSION IN METERS.
BEARINGS ARE MAGNETIC.

VAR 04° E 2018
Annual
Change 05° E

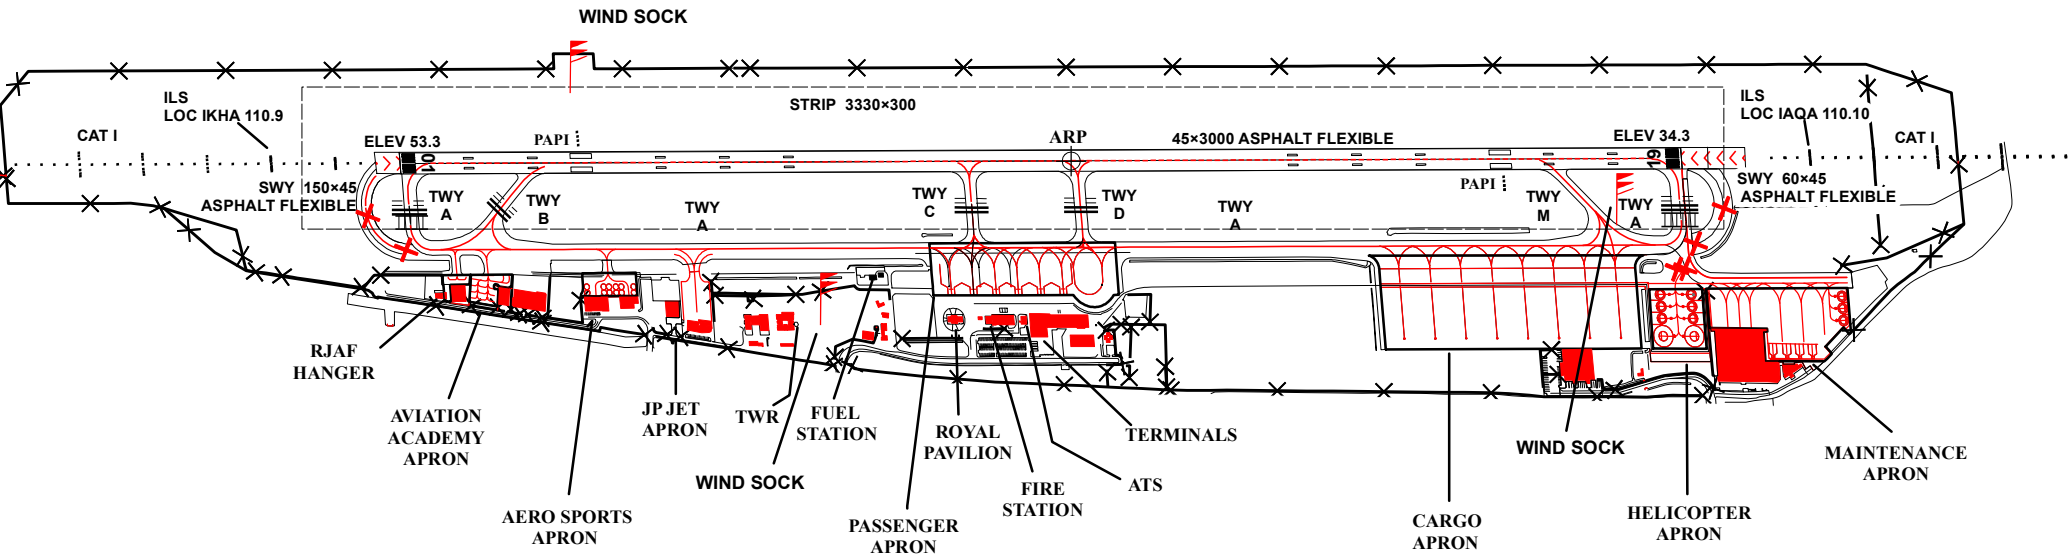

1 : 18000



change : PCR values