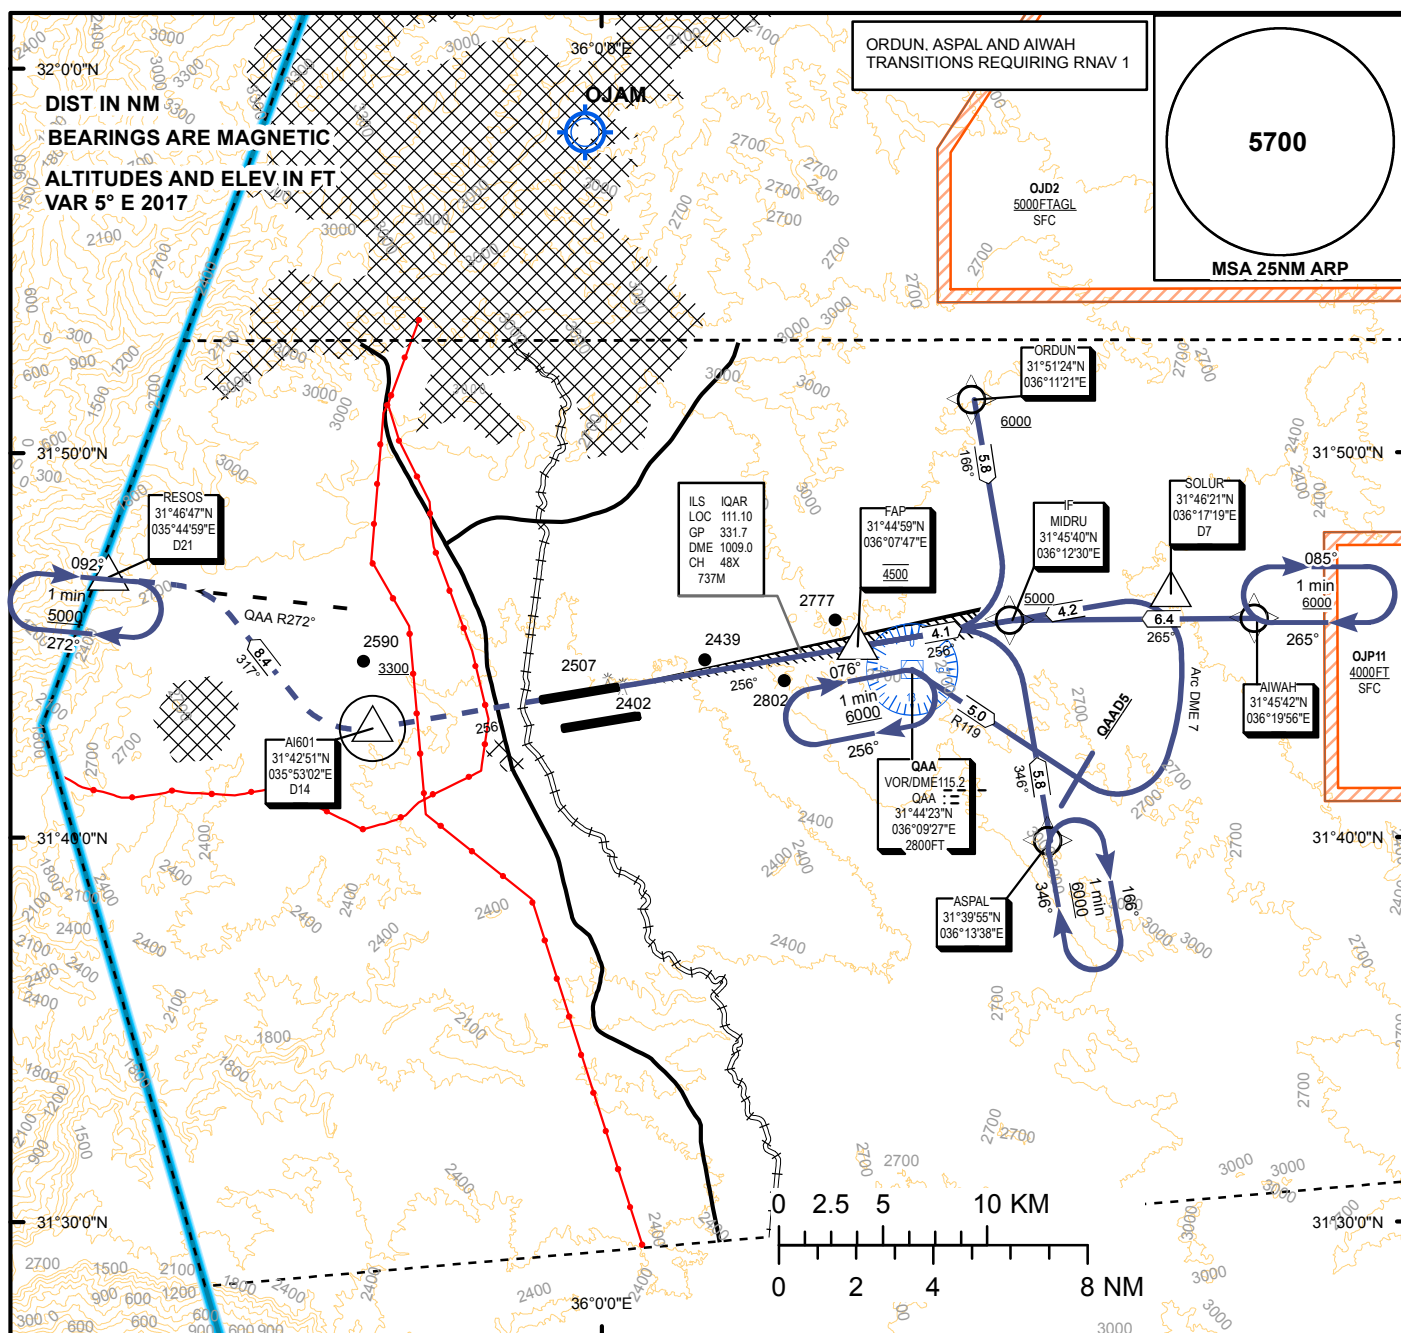


**INSTRUMENT
APPROACH
CHART - ICAO**AD ELEV 2397 FT
Trans Alt 13000TWR 119.8
APP 128.9**AMMAN/QUEEN ALIA INTL (OJAI)**


ILS RWY26R

ALL AIRCRAFT CATEGORY

**MISSED APPROACH**

CLIMB ON TRACK TO AI601 (QAA D14)
TURN RIGHT TO HEADING 317°
INTERCEPT QAA R272 AND PROCEED ON R272
TO RESOS (QAA D21) CLIMBING TO 5000 FT.
MAX IAS 210 Kts

ILS RDH 51
AD ELEV 2395

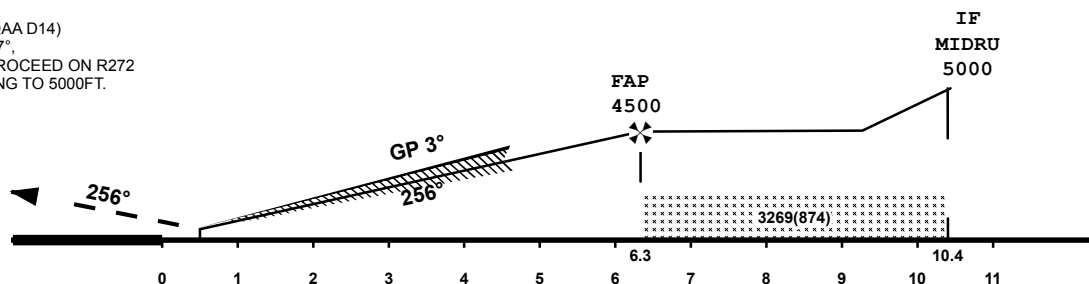

OCA (OCH)		A	B	C	D								
Straight In Approach	Cat I	2574 (179)	2586 (191)	2595 (200)	2605(210)	DIST THR	5.4	4.4	3.4	2.4	1.4		
	Cat II	2486 (91)	2504 (109)	2515 (120)	2530 (135)	ALTITUDE	4197	3871	3546	3221	2896		
						HEIGHT	(1802)	(1476)	(1151)	(826)	(501)		
Circling		3500 (1105)				GS	Kt	80	100	120	140	160	180
						Rate of descent	ft/min	420	530	640	740	850	950
						FAF-MAPT 5.8 NM	min:sec	04:22	03:30	02:55	02:30	02:11	01:57

ROUTE DESCRIPTION: RNAV TRANSITIONS FOR ILS RWY26R

Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	MAX Speed KT	VPA (°)	Navigation Specification
ORDUN											
1	IF	ORDUN(IAF)	-		4.6	-	-	+6000	210	-	RNAV1
2	TF	MIDRU(IF)	-	166(170.3)	4.6	5.8	-	+5000	210	-	RNAV1
ASPAL											
1	IF	ASPAL(IAF)	-		4.6	-	-	+6000	210	-	RNAV1
2	TF	MIDRU(IF)	-	346(350.3)	4.6	5.8	-	+5000	210	-	RNAV1
AIWAH											
1	IF	AIWAH(IAF)	-		4.6	-	-	+6000	210	-	RNAV1
2	TF	MIDRU(IF)	-	265(269.7)	4.6	6.4	-	+5000	210	-	RNAV1

Holding instruction / areas RNAV (GNSS) RWY 26R

Path description	fix identifier	inbound course Deg Mag	OUTBOUND LEG LIMIT	turn direction	minimum altitude	maximum altitudes	MAX SPEED KT	magnetic variation	Navigation specifications
HOLD	AIWAH(IAF)	265	1 MIN	R	6000	-	210	4.6E	RNAV1
HOLD	ASPAL(IAF)	346	1 MIN	R	6000	-	210	4.6E	RNAV1
HOLD	RESOS (MAHF)	092	1 MIN	R	5000	-	210	4.6E	RNAV1

WAYPOINT LIST

Waypoint Identifier	Coordinates	
AIWAH	314541.79N	0361956.22E
ASPAL	313955.45N	0361338.19E
ORDUN	315124.02N	0361121.01E
RESOS	314646.57N	0354459.07E