


INSTRUMENT
APPROACH
CHART — ICAOAERODROME ELEV 2555 ft
HEIGHTS RELATED TO
THR RWY 24 — ELEV 2458 ftAPP 128.9
TWR 118.1

AMMAN/Marka International (OJAM)

ILS Z RWY 24

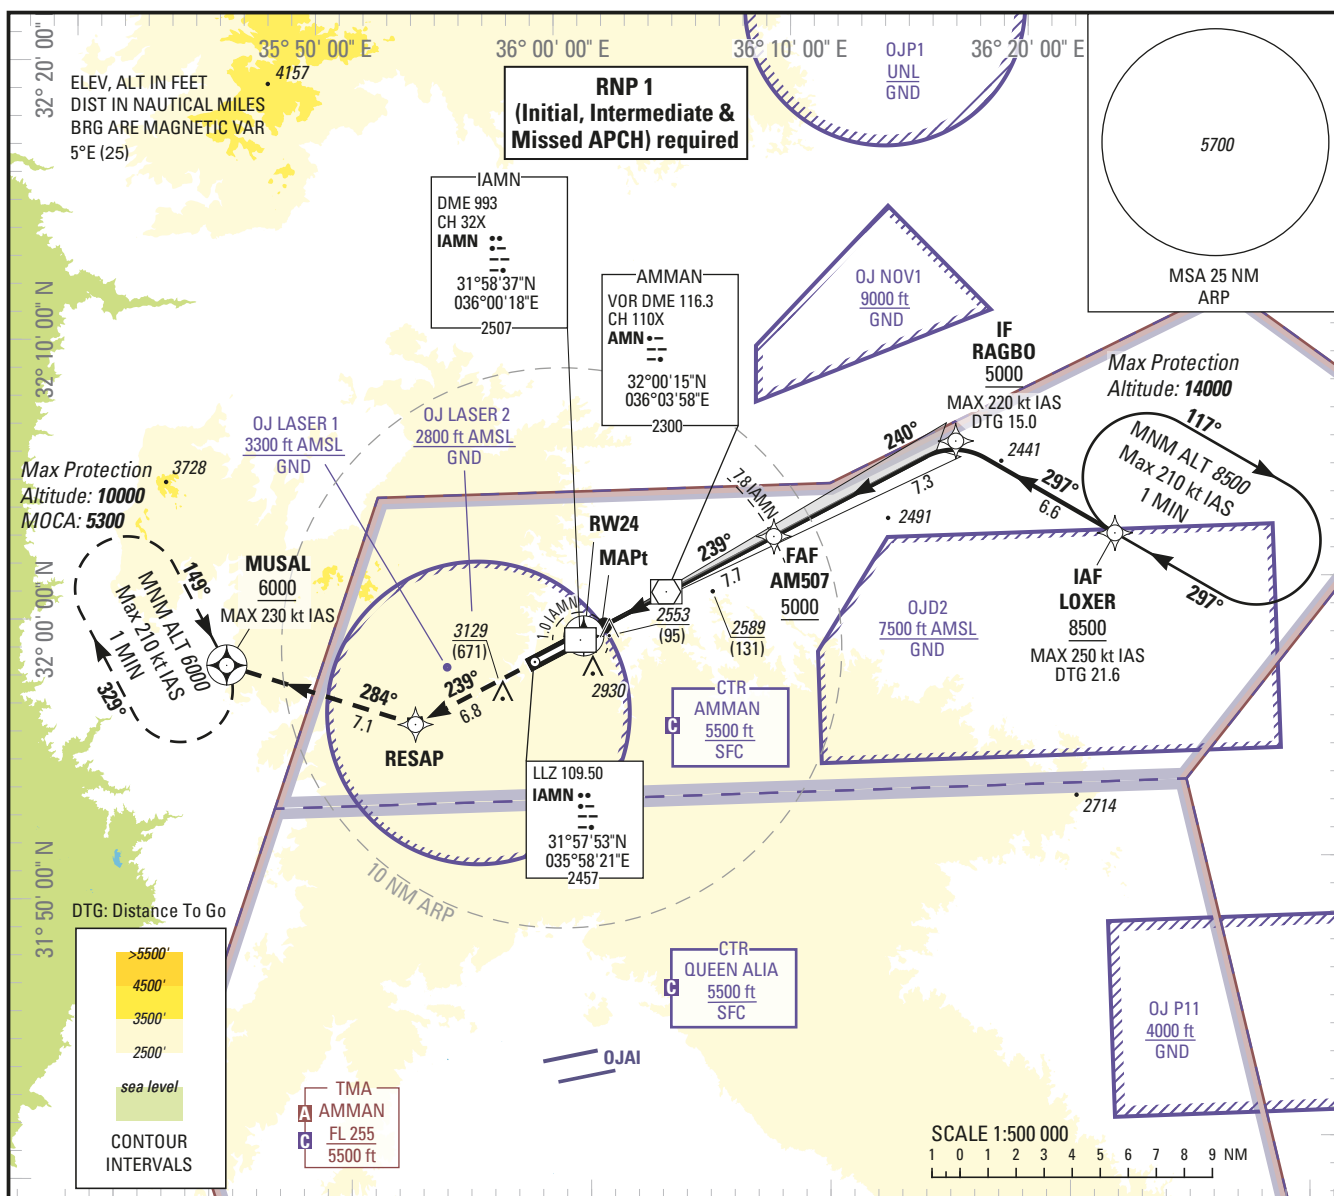


CHANGE: New IFP procedure

MISSED APPROACH:

Climb to **RESAP** on course **239°M**, then to **MUSAL** (Max 230 kt IAS) at **6000** (3542) and hold or follow ATC instructions. If unable to reach **6000** over **MUSAL**, continue to climb in the holding.

For a new approach, expect to join **LOXER** via **RALNA 1K STAR** on ATC clearance.

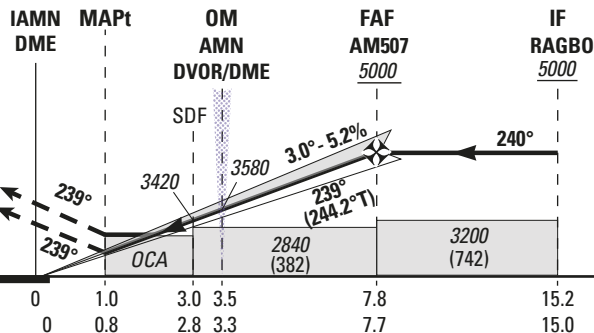ILS RDH 49
THR ELEV 2458NM to IAMN DME
NM to THR RWY 24

OCA (H)		A	B	C	D/DL										
Straight-in Approach	Cat I 2.5%	2680 (230)	2690 (240)	2710 (250)	2720 (260)	GS	kt	70	85	100	115	130	145	160	185
	Cat I 3.0%	2660 (200)			2680 (220)										
	GP INOP 2.5%	2800 (350)													
Circling		NOT AUTHORIZED				Rate of descent 5.2%	ft/min	370	450	530	610	680	760	840	970

INSTRUCTIONS

ILS Z RWY 24 Minima

Minima ILS CAT I

The standard ILS CAT I Minima below are determined for ACFT performing an ILS CAT I procedure which are able to maintain a climbing slope greater than 2.5% during a missed APCH.

<i>Slope in missed approach</i>	<i>OCA (H)</i>			
	A	B	C	D/DL
3.0%	2660 (200)			2680 (220)

Minima GP INOP

The standard GP INOP Minima below are determined for ACFT performing a GP INOP procedure which are able to maintain a climbing slope greater than 2.5% during a missed APCH.

<i>Slope in missed approach</i>	<i>OCA (H)</i>			
	A	B	C	D
3.0%	2810 (350)	2840 (380)	2870 (410)	2890 (440)
4.0%	2790 (340)	2810 (350)	2850 (390)	2880 (420)
5.0%	2790 (340)			

Holding instruction

Path Descriptor	Waypoint Identifier	Inbound Course °M (°T)	Leg Distance	Turn direction	Minimum Altitude (ft/FL)	Maximum Altitude (ft/FL)	Speed Limit (kt)	Magnetic Variation	Navigation Specification
Hold	LOXER	297 (302.0)	1 min	R	8500	14000	210	+5.0	RNP 1
Hold	MUSAL	149 (154.0)	1 min	R	6000	10000	210	+5.0	RNP 1

Route Description: IAC RNP ILS Z RWY 24

RNP ILS Z RWY 24											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	LOXER	-	-	-	-	-	+8500	-250	-	RNP APCH
20	TF	RAGBO	-	297 (302.1)	+5.0	6.6	-	+5000	-220	-	RNP APCH
10	IF	RAGBO	-	-	-	-	-	+5000	-220	-	RNP APCH
20	TF	AM507	-	240 (244.3)	+5.0	7.3	-	+5000	-	-	RNP APCH
30	TF	RW24	Y	239 (244.2)	+5.0	7.7	-	@2507	-	-3.0/ 49	RNP APCH
10	CF	RESAP	-	239 (244.2)	+5.0	6.8	-	-	-	-	RNP APCH
20	TF	MUSAL	Y	284 (289.2)	+5.0	7.1	-	+6000	-230	-	RNP APCH
30	HM	MUSAL	Y	149 (154.0)	+5.0	-	R	+6000	-210	-	RNP APCH

Aeronautical Data Tabulation: IAC RNP ILS Z RWY 24

WAYPOINT LIST		
Waypoint / Fix	Latitude	Longitude
LOXER	32°01'47.760"N	036°22'51.460"E
RAGBO	32°05'16.740"N	036°16'19.138"E
AM507	32°02'05.554"N	036°08'33.034"E
RW24	31°58'45.039"N	036°00'26.088"E
RESAP	31°55'47.305"N	035°53'15.974"E
MUSAL	31°58'06.720"N	035°45'25.610"E