


**STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO**ACC 128.5 MHz
APP 128.9 MHz
TWR 119.8 MHz
GND 121.9 MHzTRANSITION ALTITUDE
13000**AMMAN/QUEEN ALIA INTL (OJAI)
RNAV(GNSS) RWY 08L**GENEX 6T KIPAS 6T LOSAR 6T MUNRA 6T
LOSIL 6T LUDAN 6T MOUAB 6T OSAMA 6T

CHANGE: GND FREQ.

20/7/2017

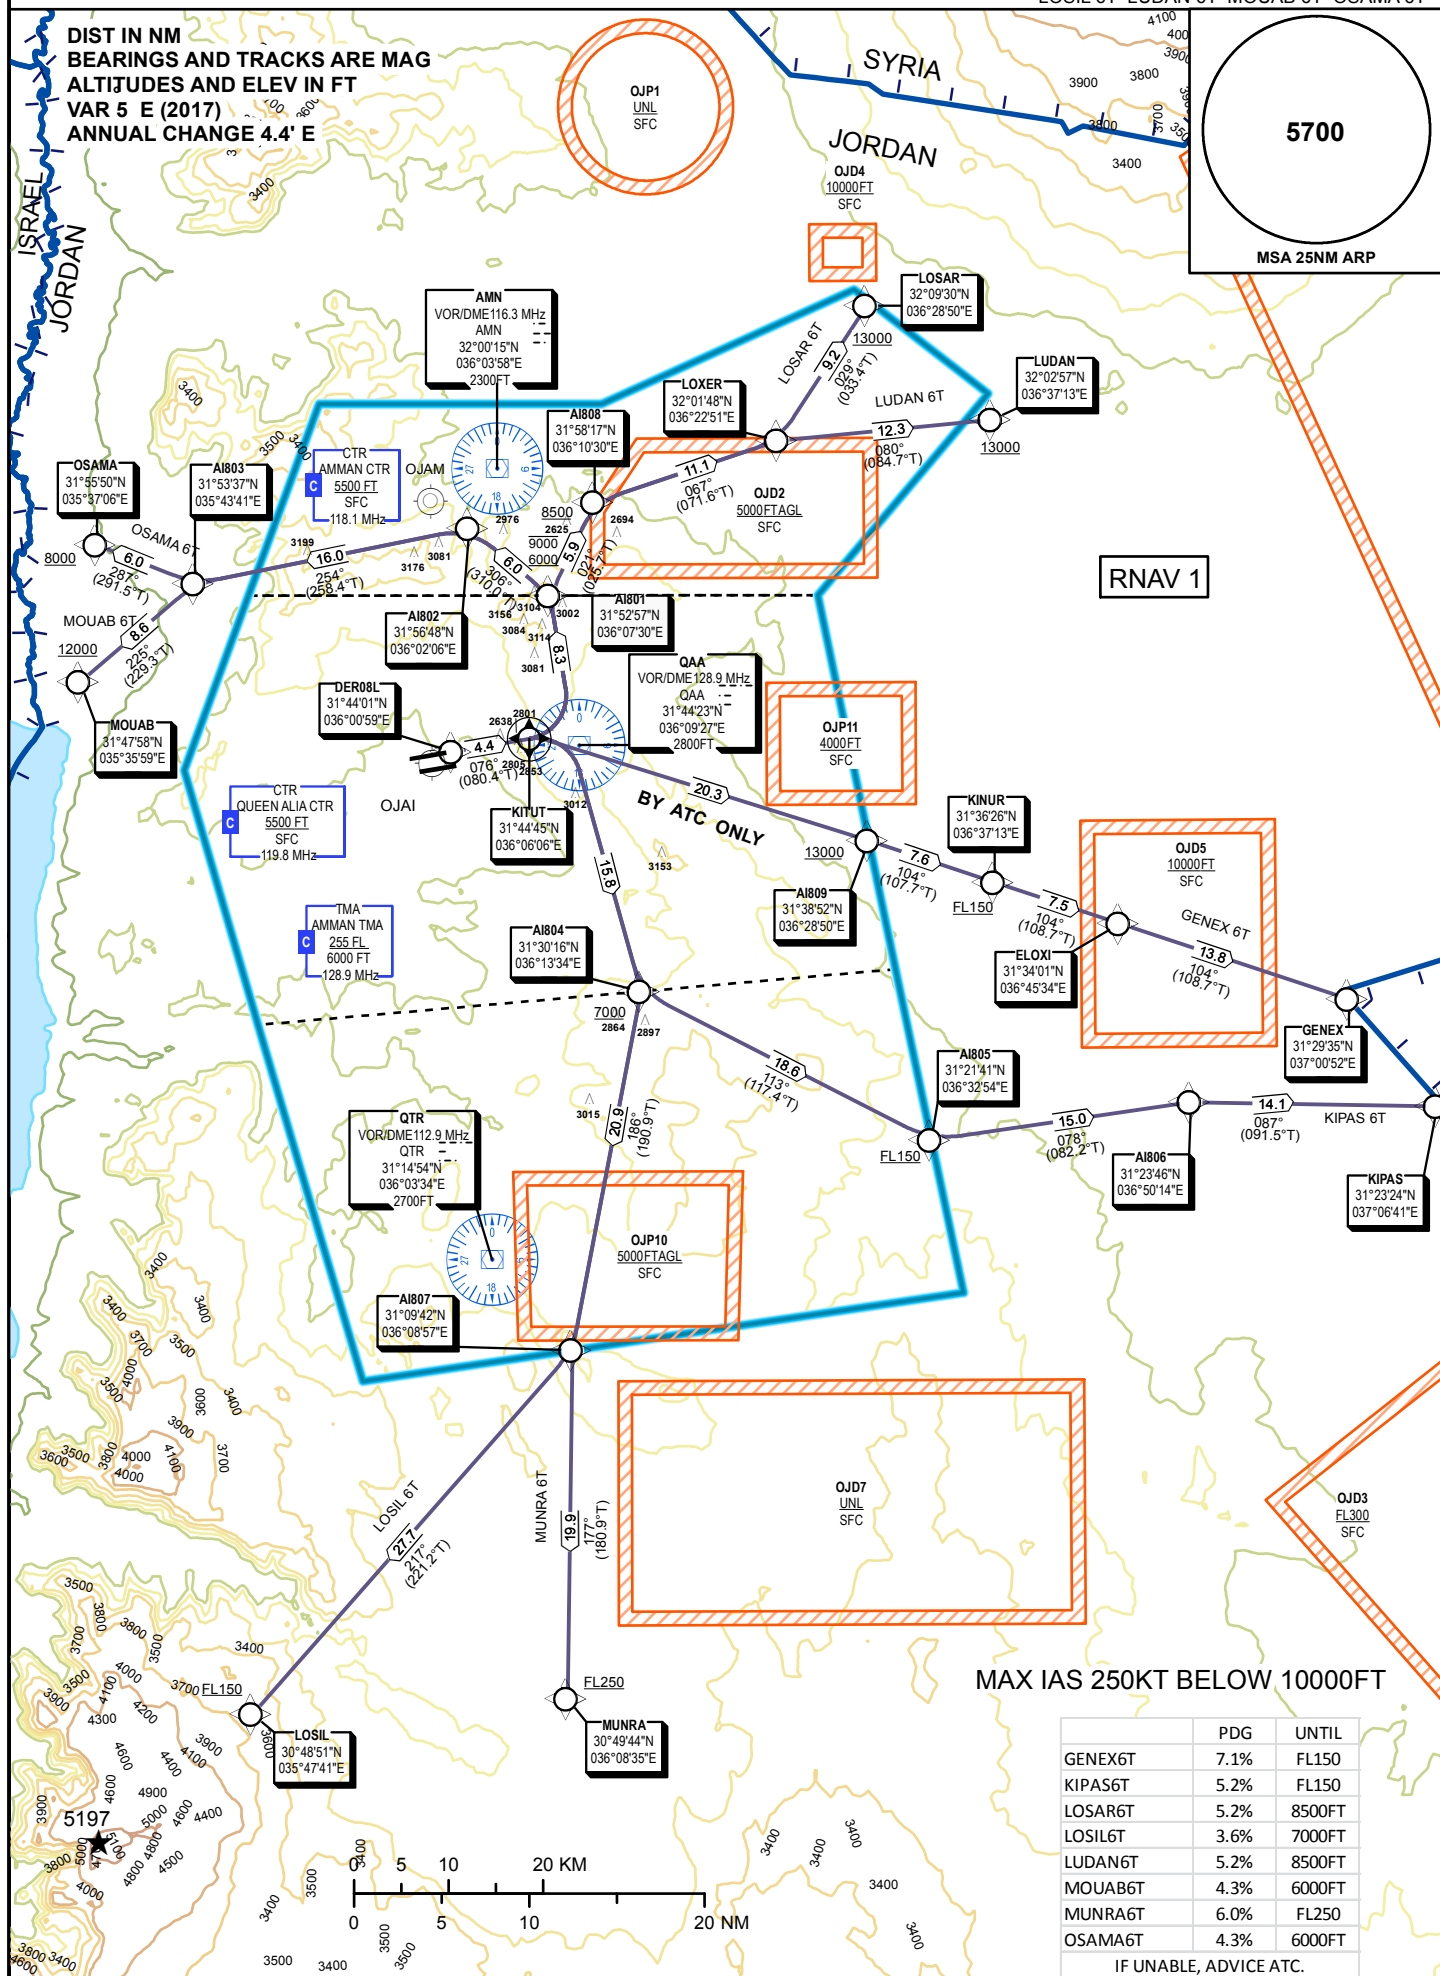

ROUTE DESCRIPTION: RNAV (GNSS) DEPARTURE RWY08L										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation (°)	Distance NM	Turn Direction	ALT/FL	Max. Speed KT	Navigation Specification
GENEX 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+4300	210	RNAV1
3	DF	AI809	-		4.4	20.3	R	+13000	-	RNAV1
4	TF	KINUR	-	104(107.7)	4.4	7.6	R	+FL150	250	RNAV1
5	TF	ELOXI	-	104(108.7)	4.4	7.5	R	-	-	RNAV1
6	TF	GENEX	-	104(108.7)	4.4	13.8	R	-	-	RNAV1
KIPAS 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+3800	230	RNAV1
3	DF	AI804	-		4.4	15.8	R	+7000	-	RNAV1
4	TF	AI805	-	113(117.4)	4.4	18.6	L	+FL150	250	RNAV1
5	TF	AI806	-	78(82.2)	4.4	15	L	-	-	RNAV1
6	TF	KIPAS	-	87(91.5)	4.4	14.1	R	-	-	RNAV1
LOSAR 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+3800	230	RNAV1
3	DF	AI801	-		4.4	8.3	L	-9000 +6000	-	RNAV1
4	TF	AI808	-	21(25.7)	4.4	5.9	R	+8500	250	RNAV1
5	TF	LOXER	-	67(71.6)	4.4	11.1	R	-	-	RNAV1
6	TF	LOSAR	-	29(33.4)	4.4	9.2	L	+13000	-	RNAV1
LOSIL 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+3500	230	RNAV1
3	DF	AI804	-		4.4	15.8	R	+7000	-	RNAV1
4	TF	AI807	-	186(190.9)	4.4	20.9	R	-	250	RNAV1
5	TF	LOSIL	-	217(221.2)	4.4	27.7	R	+FL150	-	RNAV1
LUDAN 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+3800	230	RNAV1
3	DF	AI801	-		4.4	8.3	L	-9000 +6000	-	RNAV1
4	TF	AI808	-	21(25.7)	4.4	5.9	R	+8500	250	RNAV1
5	TF	LOXER	-	67(71.6)	4.4	11.1	R	-	-	RNAV1
6	TF	LUDAN	-	80(84.7)	4.4	12.3	R	+13000	-	RNAV1

ROUTE DESCRIPTION: RNAV (GNSS) DEPARTURE RWY08L										
Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	ALT/FL	Max. Speed KT	Navigation Specification
MOUAB 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+3600	230	RNAV1
3	DF	AI801	-		4.4	8.3	L	-9000 +6000	-	RNAV1
4	TF	AI802	-	306(310)	4.4	6	L	-	250	RNAV1
5	TF	AI803	-	254(258.4)	4.4	16	L	-	-	RNAV1
6	TF	MOUAB	-	225(229.3)	4.4	8.6	L	+12000	-	RNAV1
MUNRA 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+4000	230	RNAV1
3	DF	AI804	-		4.4	15.8	R	+7000	-	RNAV1
4	TF	AI807	-	186(190.9)	4.4	20.9	R	-	250	RNAV1
5	TF	MUNRA	-	177(180.9)	4.4	19.9	L	+FL250	-	RNAV1
OSAMA 6T										
1		DER08L			4.4					RNAV1
2	CF	KITUT	Y	76(80.4)	4.4	4.4	-	+3600	230	RNAV1
3	DF	AI801	-		4.4	8.3	L	-9000 +6000	-	RNAV1
4	TF	AI802	-	306(310)	4.4	6	L	-	250	RNAV1
5	TF	AI803	-	254(258.4)	4.4	16	L	-	-	RNAV1
6	TF	OSAMA	-	287(291.5)	4.4	6	R	+8000	-	RNAV1

WAYPOINT LIST					
Waypoint Identifier	Coordinates		Waypoint Identifier	Coordinates	
AI801	315256.69N	0360729.52E	GENEX	312935.47N	0370051.52E
AI802	315648.33N	0360205.63E	KINUR	313626.07N	0363712.78E
AI803	315336.92N	0354340.83E	KIPAS	312324.00N	0370641.00E
AI804	313015.59N	0361333.62E	KITUT	314445.05N	0360605.76E
AI805	312141.46N	0363254.06E	LOSAR	320930.06N	0362849.77E
AI806	312345.66N	0365014.19E	LOSIL	304851.20N	0354741.31E
AI807	310942.22N	0360856.80E	LOXER	320147.76N	0362251.46E
AI808	315817.12N	0361030.31E	LUDAN	320256.60N	0363713.29E
AI809	313851.60N	0362849.71E	MOUAB	314758.00N	0353559.00E
DER08L	314400.57N	0360058.78E	MUNRA	304944.29N	0360834.88E
ELOXI	313400.99N	0364534.23E	OSAMA	315550.00N	0353706.00E