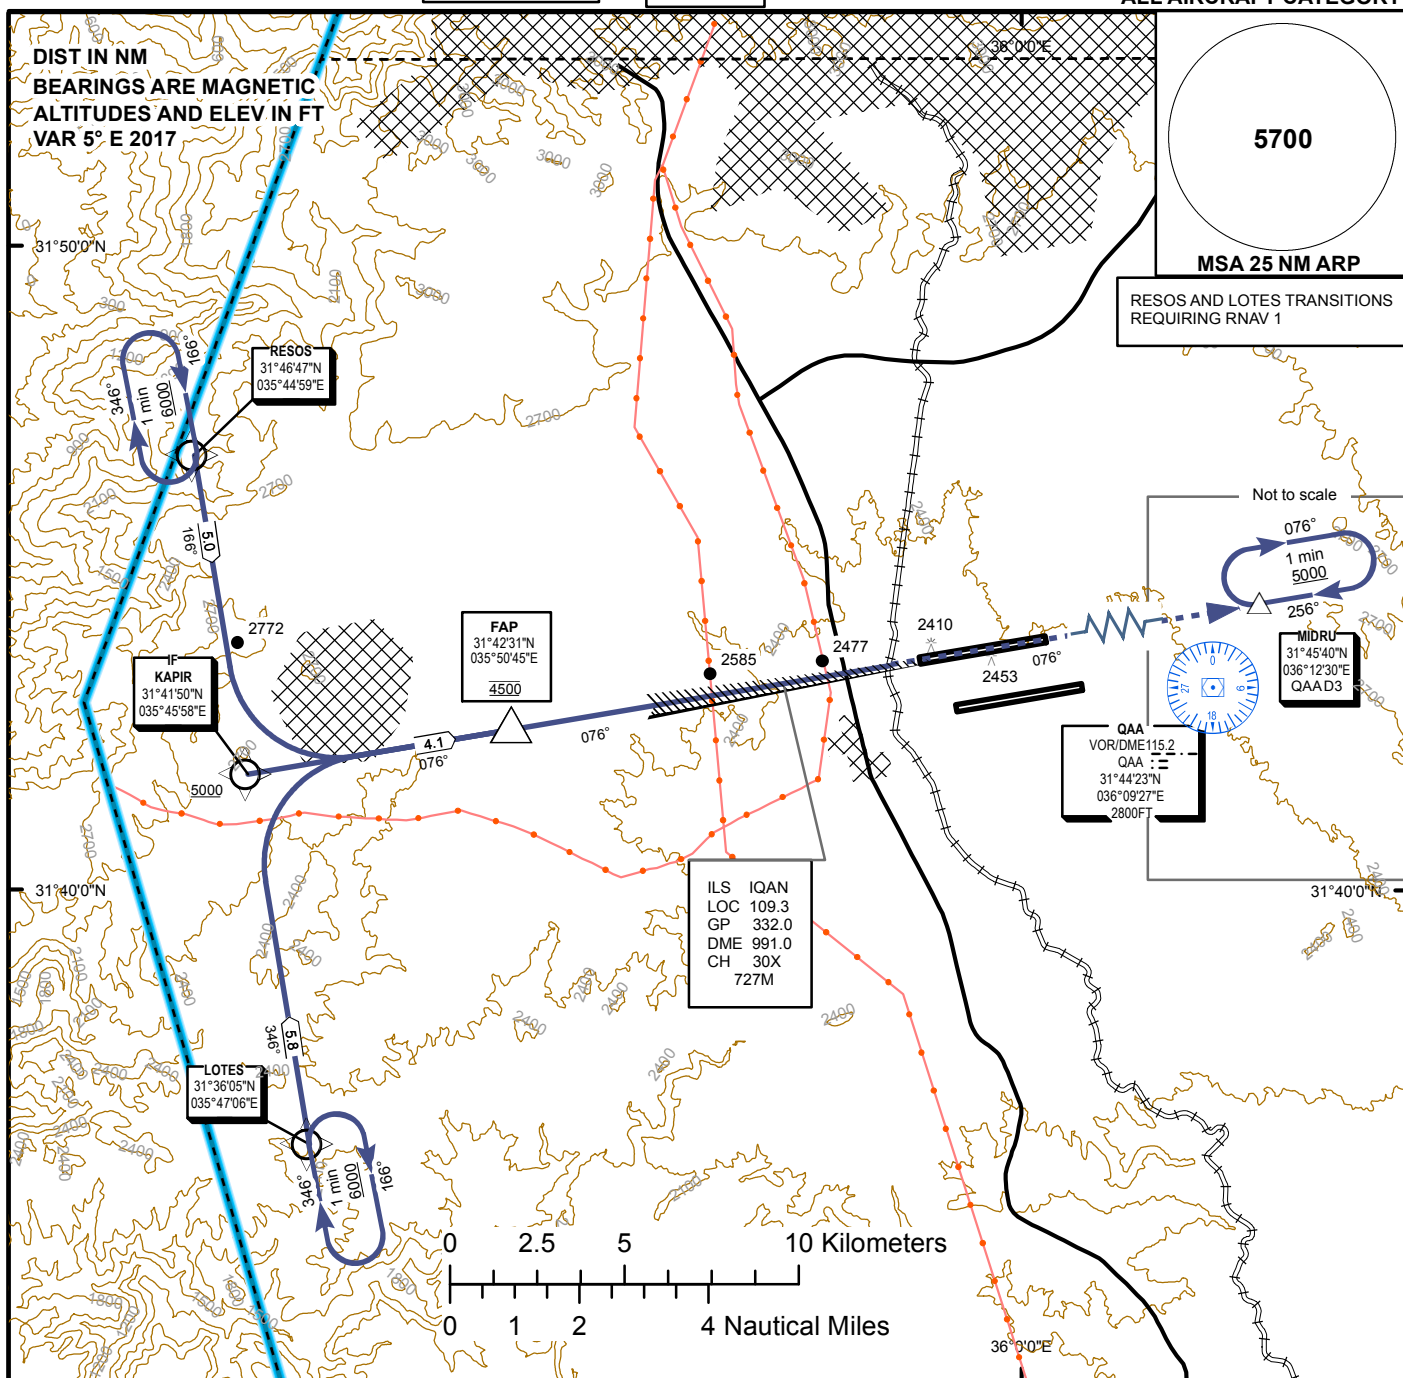


INSTRUMENT APPROACH
CHART - ICAOAD ELEV 2397 FT
Trans Alt 13000TWR 119.8
APP 128.9AMMAN/QUEEN ALIA INTL (OJAI)
ILS RWY08L
ALL AIRCRAFT CATEGORY

MISSED APPROACH

CLIMB ON TRACK 076° TO MIDRU (QAA D3)
CLIMBING TO 5000FT.
MAX IAS 210 KtsIF
KAPIR
5000FAP
4500

GP 3°

076°

076°

ILS RDH 55
THR ELEV 2362

11 10.6 10 9 8 7 6 5 4 3 2 1 0

OCA (OCH)		A	B	C	D								
Straight In Approach	Cat I	2540 (178)	2552 (190)	2560 (198)	2571 (209)	DIST THR	6.4	5.4	4.4	3.4	2.4		
	Cat II	2452 (90)	2469 (107)	2481 (119)	2495 (133)	ALTITUDE	4493	4168	3843	3518	3193		
						HEIGHT	(2131)	(1806)	(1481)	(1156)	(831)		
Circling		3500 (1138)				GS	Kt	80	100	120	140	160	180
						Rate of descent	ft/min	420	530	640	740	850	950
						FAF-MAPT 5.9 NM	min:sec	04:27	03:34	02:58	02:33	02:14	01:59

ROUTE DESCRIPTION: RNAV TRANSITIONS FOR ILS RWY 08L

Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	MAX Speed KT	VPA (°)	Navigation Specification
RESOS											
1	IF	RESOS(IAF)	-	-	4.6	-	-	+6000	210	-	RNAV1
2	TF	KAPIR(IF)	-	166(170.4)	4.6	5	-	+5000	210	-	RNAV1
LOTES											
1	IF	LOTES(IAF)	-	-	4.6	-	-	+6000	210	-	RNAV1
2	TF	KAPIR(IF)	-	346(350.4)	4.6	5.8	-	+5000	210	-	RNAV1

Holding instruction / areas RNAV (GNSS) RWY08L

Path description	fix identifier	inbound course DEG MAG	OUTBOUND LEG LIMIT	turn direction	minimum altitude	maximum altitudes	MAX SPEED KT	magnetic variation	Navigation specifications
HOLD	RESOS (IAF)	166	1 MIN	R	6000	-	210	4.6E	RNAV1
HOLD	LOTES (IAF)	346	1 MIN	R	6000	-	210	4.6E	RNAV1
HOLD	MIDRU (MAHF)	256	1 MIN	R	5000	-	210	4.6E	RNAV1

WAYPOINT LIST

Waypoint Identifier	Coordinates
KAPIR	314149.59N 0354557.90E
LOTES	313604.89N 0354705.83E
MIDRU	314539.75N 0361229.67E
RESOS	314646.57N 0354459.07E