


TRANSITION LEVEL
FL 150

TRANSITION ALTITUDE
13000 ft

ATIS	127.6
APP	128.9
TWR	119.8

**AMMAN/Queen Alia Intl. (OJAI)
RNAV RWY 08 L/R**

SOBAK 1E RABES 1E LOSIL 1E
LUDAN 1E MUNRA 1E RALNA 1E

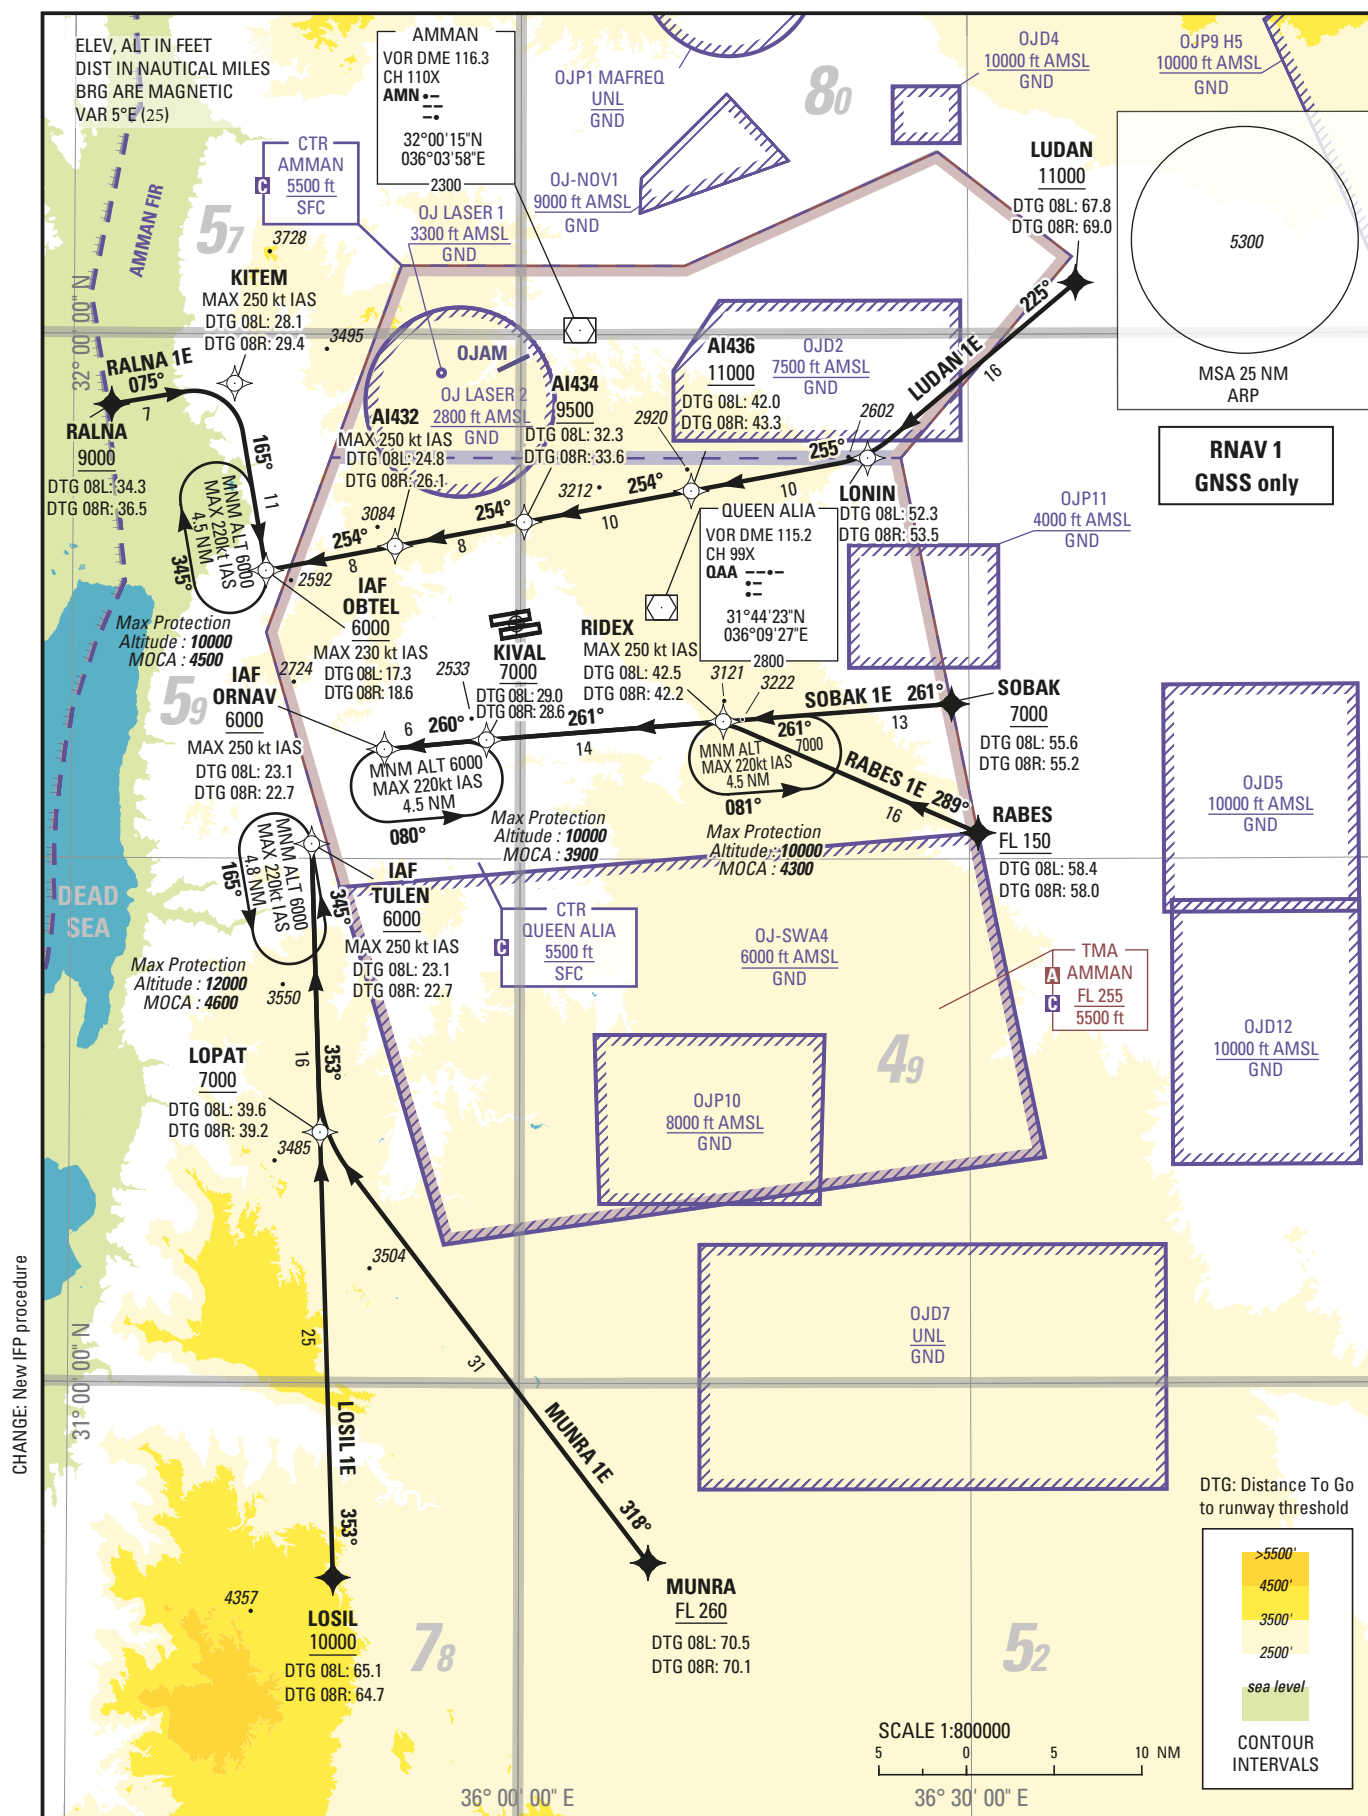

ARRIVAL TEXTS for RNAV STAR RWY08 L/R

RALNA 1E

From RALNA at or above 9000 FT to KITEM maximum 250 KIAS to OBTEL (IAF) at or above 6000 FT and maximum 230 KIAS.

LUDAN 1E

From LUDAN at or above 11000 FT to LONIN to AI436 at or above 11000 FT to AI434 at or above 9500 FT to AI432 maximum 250 KIAS to OBTEL (IAF) at or above 6000 FT and maximum 230 KIAS.

SOBAK1E

From SOBAK at or above 7000 FT to RIDEX maximum 250 KIAS to KIVAL at or above 7000 FT to ORNAV at or above 6000 FT and maximum 250 KIAS.

RABES 1E

From RABES at or above FL 150 to RIDEX maximum 250 KIAS to KIVAL at or above 7000 FT to ORNAV at or above 6000 FT and maximum 250 KIAS.

LOSIL 1E

From LOSIL at or above 10000 FT to LOPAT at or above 7000 FT to TULEN (IAF) at or above 6000 FT and maximum 250 KIAS.

MUNRA 1E

From MUNRA at or above FL 260 to LOPAT at or above 7000 FT to TULEN (IAF) at or above 6000 FT and maximum 250 KIAS.

Holding instruction

Path Descriptor	Waypoint Identifier	Heading Course °M (°T)	Leg Distance	Turn direction	Minimum Altitude (ft/FL)	Maximum Altitude (ft/FL)	Speed Limit (kt)	Magnetic Variation	Navigation Specification
Hold	RIDEX	261 (266.0)	-	L	7000	10000	220	+5.0	RNAV 1
Hold	ORNAV	260 (265.0)	-	L	6000	10000	220	+5.0	RNAV 1
Hold	OBTEL	165 (170.0)	-	R	6000	10000	220	+5.0	RNAV 1
Hold	TULEN	345 (350.0)	-	L	6000	12000	220	+5.0	RNAV 1

Route Description: RNAV STAR RWY08 L/R

STAR RALNA 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	RALNA	-	-	-	-	-	+9000	-	-	RNAV 1
20	TF	KITEM	-	075 (080.2)	+5.0	7.1	-	-	-250	-	RNAV 1
30	TF	OBTEL	-	165 (170.2)	+5.0	10.8	-	+6000	-230	-	RNAV 1
STAR LUDAN 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	LUDAN	-	-	-	-	-	+11000	-	-	RNAV 1
20	TF	LONIN	-	225 (230.0)	+5.0	15.5	-	-	-	-	RNAV 1
30	TF	AI436	-	255 (259.5)	+5.0	10.2	-	+11000	-	-	RNAV 1
40	TF	AI434	-	254 (259.4)	+5.0	9.7	-	+9500	-	-	RNAV 1
50	TF	AI432	-	254 (259.3)	+5.0	7.5	-	-	-250	-	RNAV 1
60	TF	OBTEL	-	254 (259.3)	+5.0	7.5	-	+6000	-230	-	RNAV 1

STAR SOBAK 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	SOBAK	-	-	-	-	-	+7000		-	RNAV 1
20	TF	RIDEX	-	261 (265.7)	+5.0	13.1	-	-	-250	-	RNAV 1
30	TF	KIVAL	-	261 (265.6)	+5.0	13.6	-	+7000		-	RNAV 1
40	TF	ORNAV	-	260 (264.6)	+5.0	5.8	-	+6000	-250	-	RNAV 1
STAR RABES 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	RABES	-	-	-	-	-	+FL150		-	RNAV 1
20	TF	RIDEX	-	289 (293.7)	+5.0	15.9	-	-	-250	-	RNAV 1
30	TF	KIVAL	-	261 (265.6)	+5.0	13.6	-	+7000		-	RNAV 1
40	TF	ORNAV	-	260 (264.6)	+5.0	5.8	-	+6000	-250	-	RNAV 1
STAR MUNRA 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	MUNRA	-	-	-	-	-	+FL260	-	-	RNAV 1
20	TF	LOPAT	-	318 (322.7)	+5.0	30.9	-	+7000	-	-	RNAV 1
30	TF	TULEN	-	353 (358.1)	+5.0	16.5	-	+6000	-250	-	RNAV 1
STAR LOSIL 1E											
Serial Number	Path Descriptor	Waypoint Identifier	Fly - Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (ft/FL)	MAX IAS (kt)	VPA/TCH (°/ft)	Navigation Accuracy (NM)
10	IF	LOSIL	-	-	-	-	-	+10000	-	-	RNAV 1
20	TF	LOPAT	-	353 (358.1)	+5.0	25.4	-	+7000	-	-	RNAV 1
30	TF	TULEN	-	353 (358.1)	+5.0	16.5	-	+6000	-250	-	RNAV 1

Aeronautical Data Tabulation: RNAV STAR RWY08 L/R

WAYPOINT LIST		
Waypoint / Fix	Latitude	Longitude
SOBAK	31°38'51.600"N	036°28'49.710"E
RIDEX	31°37'52.231"N	036°13'33.985"E
KIVAL	31°36'48.697"N	035°57'44.086"E
ORNAV	31°36'15.421"N	035°50'55.033"E
RABES	31°31'29.090"N	036°30'35.113"E
LOSIL	30°48'51.200"N	035°47'41.310"E
LOPAT	31°14'19.917"N	035°46'42.831"E
TULEN	31°30'50.349"N	035°46'04.661"E
LUDAN	32°02'56.600"N	036°37'13.290"E
LONIN	31°52'56.140"N	036°23'14.710"E
AI436	31°51'03.755"N	036°11'25.441"E
AI434	31°49'16.317"N	036°00'14.224"E
AI432	31°47'52.537"N	035°51'35.324"E
OBTEL	31°46'28.170"N	035°42'56.686"E
MUNRA	30°49'44.290"N	036°08'34.880"E
RALNA	31°55'57.000"N	035°32'33.000"E
KITEM	31°57'09.798"N	035°40'47.507"E