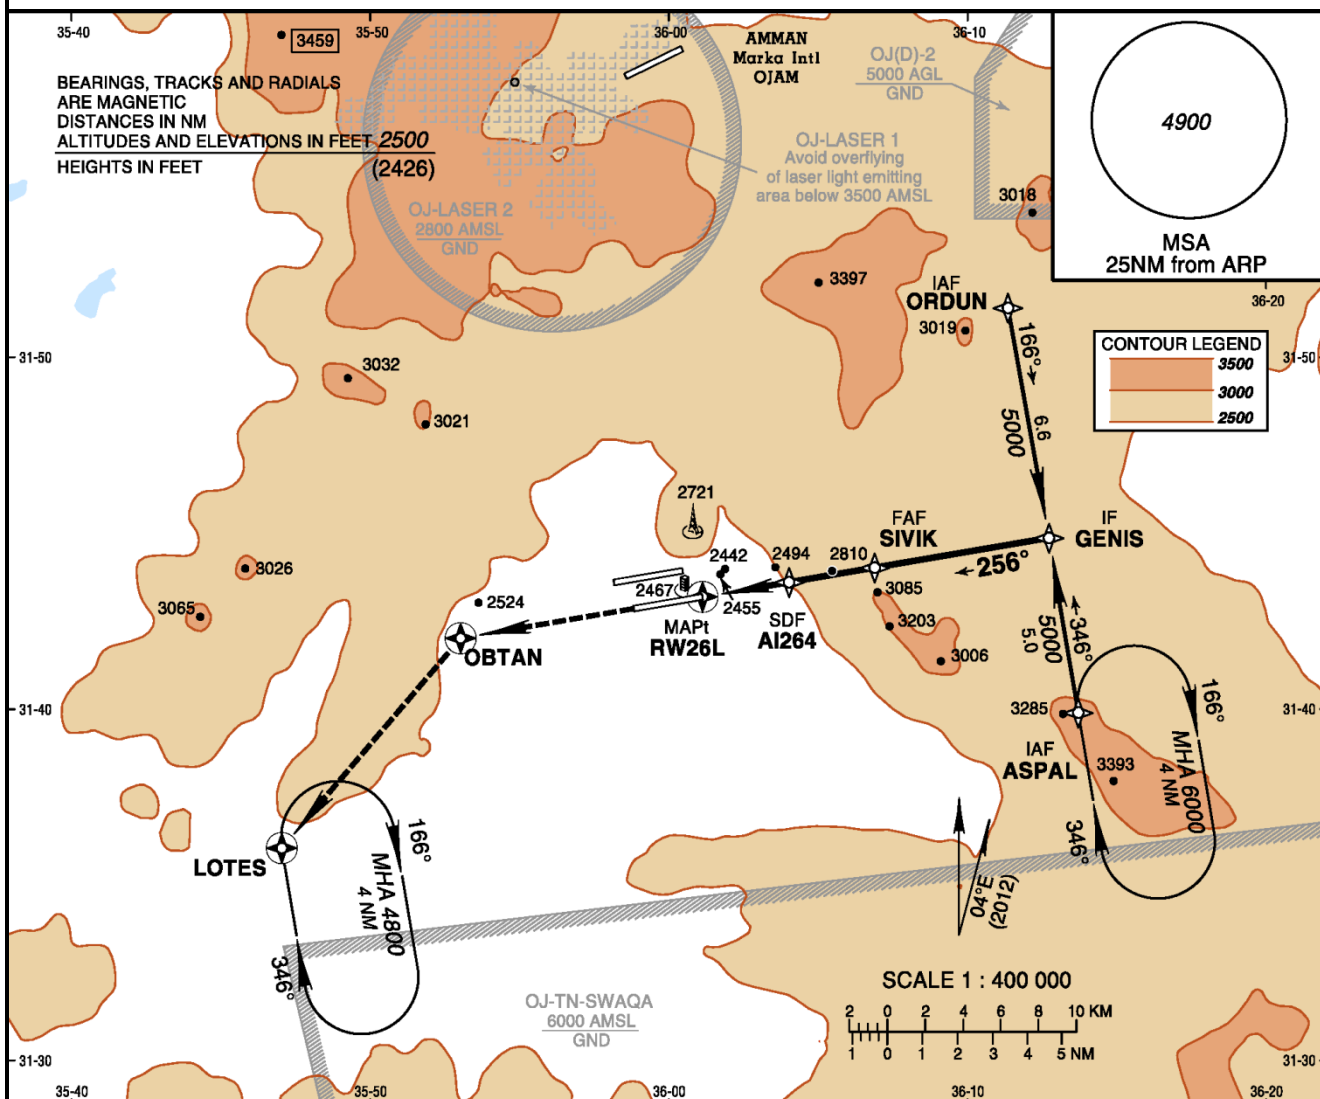
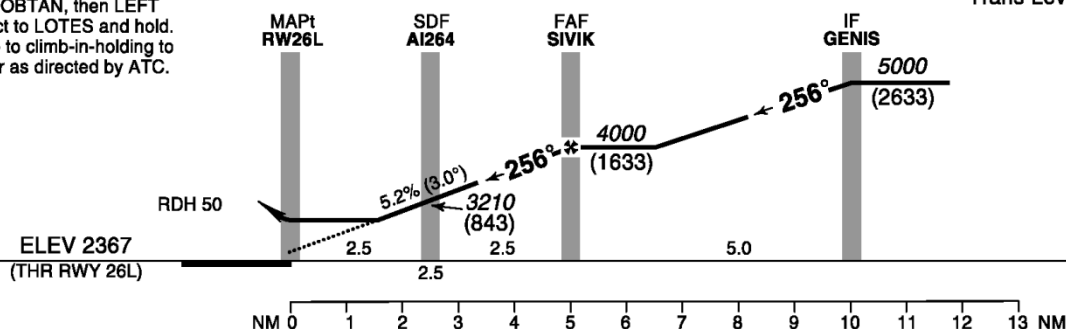


INSTRUMENT
APPROACH
CHART - ICAOAD ELEV 2397 FT
HEIGHTS RELATED TO
THR RWY 26L ELEV 2367 FTATIS 127.600
APP 128.900
TWR 118.100AMMAN/Queen Alia Intl (OJAI)
RNAV (GNSS) RWY 26L**MISSED APPROACH:**

Climb to 4800.
Direct to OBTAN, then LEFT
turn direct to LOTES and hold.
Continue to climb-in-holding to
6000, or as directed by ATC.

Trans Altitude 13000
Trans Level FL 150

STRAIGHT-IN APPROACH		A	B	C	D	ADVISORY INFORMATION ONLY				
LNAV/VNAV	OCA(H)	2690 (323)	2710 (343)			FAF to THR	NM	2	3	4
LNAV	OCA(H)	2740 (373)				Altitude (Height)		3004 (637)	3322 (955)	3641 (1274)
CIRCLING		A	B	C	D					
	OCA(H)	3020 (623)		3210 (813)	3400 (1003)	1. For uncompensated BARO-VNAV systems, procedure not authorized below 5°C (41°F). 2. When local altimeter not received, procedure not authorized. 3. No turn before MAPt. 4. Timing not authorized for defining the MAPt. 5. DME/DME not authorized. 6. MAX IAS 210 KTS for Approach and Holdings.				

Holding Instruction/Areas RNAV (GNSS) RWY 26L

Path Descriptor	Fix Identifier	Inbound course °M	Leg Distance	Turn Direction	Minimum Altitude	Maximum Altitude	Speed	Magnetic Variation	Navigation Specification
Hold	LOTES	346.42	4.0 NM	R	4800	-	210 kts	4.0°E	
Hold	ASPAL	346.34	4.0 NM	R	6000	-	210 kts	4.0°E	

Route Description: RNAV (GNSS) RWY 26L

Path Terminator	Waypoint Identifier	Flyover	Course/Track °M	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed	VPA/TCH	Navigation Specification
IF	ASPAL	N		4.0°E			+6000	210 kts		RNP APCH
TF	GENIS	N	346.34°	4.0°E	5.0*		+5000	210 kts		RNP APCH
TF	SIVIK	N	256.41°	4.0°E	5.0*	left	+4000	210 kts		RNP APCH
TF	AI264	N	256.38°	4.0°E	2.5*		+3210	210 kts		RNP APCH
TF	RW26L	Y	256.42°	4.0°E	2.5*		@2417	210 kts	-3.0 / 50'	RNP APCH
DF	OBTAN	Y		4.0°E						RNP APCH
DF	LOTES	Y		4.0°E		left	+4800	210 kts		RNP APCH

Path Terminator	Waypoint Identifier	Flyover	Course/Track °M	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed	VPA/TCH	Navigation Specification
IF	ORDUN	N		4.0°E			+6000	210 kts		RNP APCH
TF	GENIS	N	166.34°	4.0°E	6.6*		+5000	210 kts		RNP APCH
TF	SIVIK	N	256.41°	4.0°E	5.0*	right	+4000	210 kts		RNP APCH
TF	AI264	N	256.38°	4.0°E	2.5*		+3210	210 kts		RNP APCH
TF	RW26L	Y	256.42°	4.0°E	2.5*		@2417	210 kts	-3.0 / 50'	RNP APCH
DF	OBTAN	Y		4.0°E						RNP APCH
DF	LOTES	Y		4.0°E		left	+4800	210 kts		RNP APCH

* Direct distance (NM) between waypoints.

Aeronautical Data Tabulation: RNAV (GNSS) RWY 26L

Waypoint / Fix	Latitude	Longitude	Latitude (MIN)	Longitude (MIN)	Notes
ASPAL (IAF)	N31°39'55.45"	E036°13'38.19"	N31°39.924'	E036°13.637'	
ORDUN (IAF)	N31°51'24.02"	E036°11'21.01"	N31°51.400'	E036°11.350'	
GENIS (IF)	N31°44'51.83"	E036°12'39.17"	N31°44.864'	E036°12.653'	
SIVIK (FAF)	N31°44'01.40"	E036°06'50.97"	N31°44.023'	E036°06.850'	
AI264 (SDF)	N31°43'36.57"	E036°03'59.82"	N31°43.610'	E036°03.997'	
RW26L (MAPt)	N31°43'11.58"	E036°01'06.90"	N31°43.193'	E036°01.115'	
OBTAN (MAF)	N31°42'01.53"	E035°53'03.54"	N31°42.026'	E035°53.059'	
LOTES (MAHF)	N31°36'04.89"	E035°47'05.83"	N31°36.082'	E035°47.097'	