


INSTRUMENT
APPROACH
CHART — ICAOAERODROME ELEV 2396 ft
HEIGHTS RELATED TO
THR RWY 26L — ELEV 2366 ftATIS 127.6
APP 128.9
TWR 119.8

AMMAN/Queen Alia International (OJAI)

RNP RWY 26L

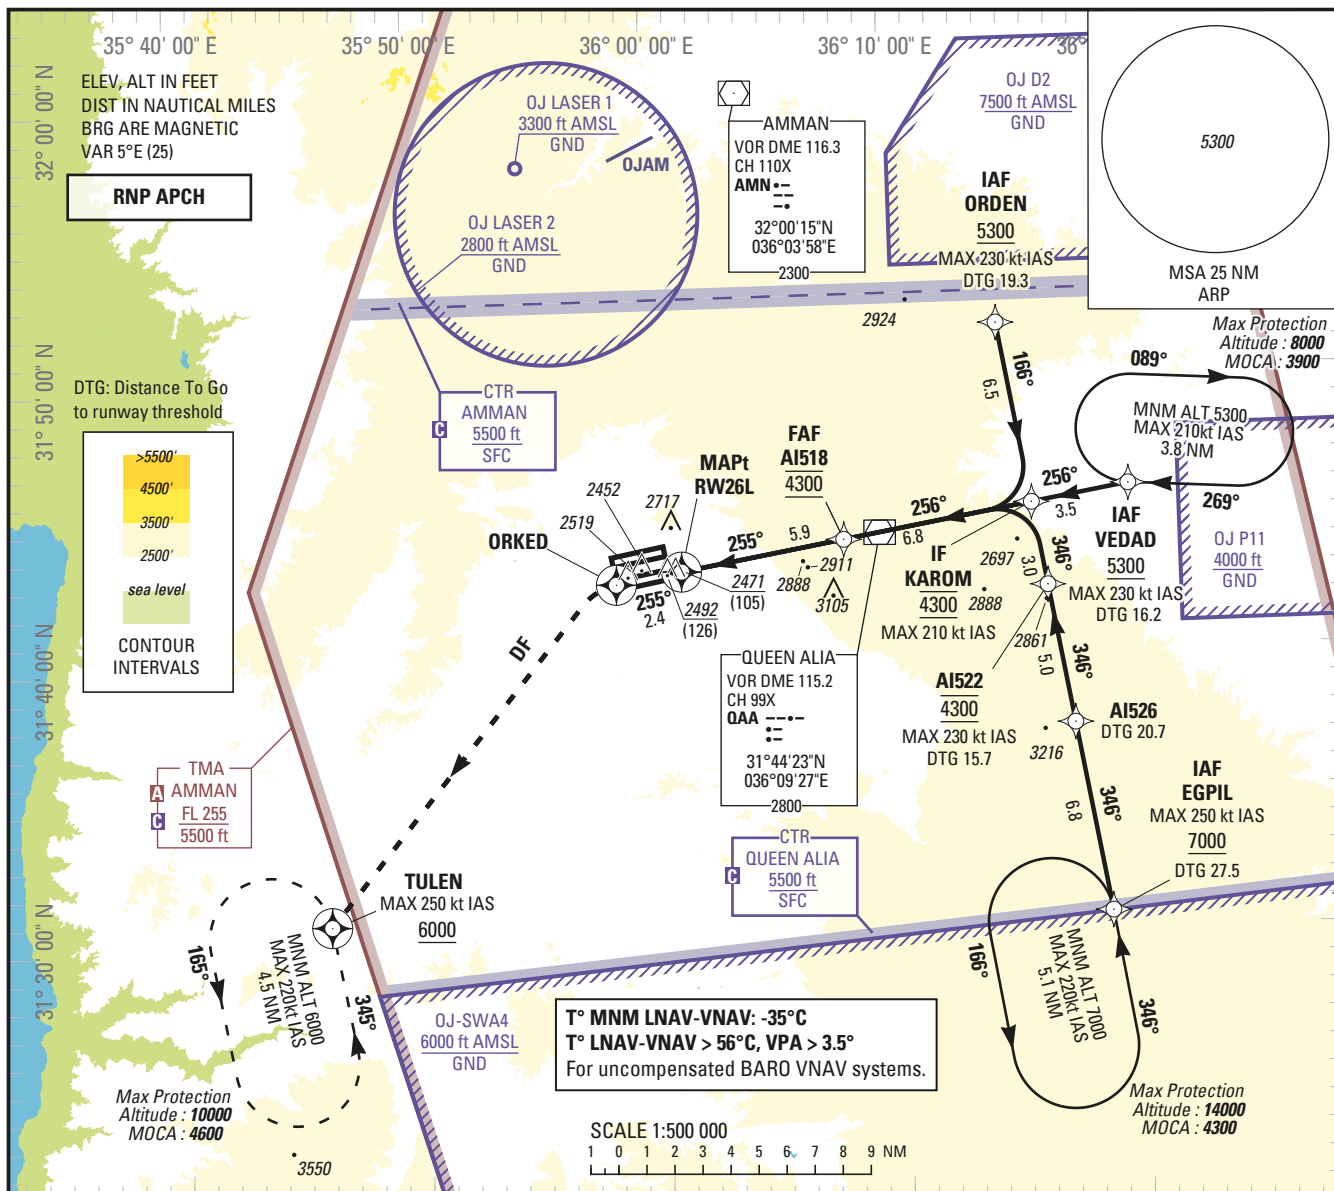


NM to THR	RWY26L	2	3	4	5
ALTITUDE		3060	3380	3690	4010

TRANSITION ALTITUDE 13000
TRANSITION LEVEL FL 150

MISSED APPROACH:

Climb to **ORKED** on course **255°M**, then turn **left** direct to **TULEN** (MAX 250 kt IAS) at **6000** (3634) and hold or follow ATC instructions.

If unable to reach holding altitude, continue to climb in the holding.

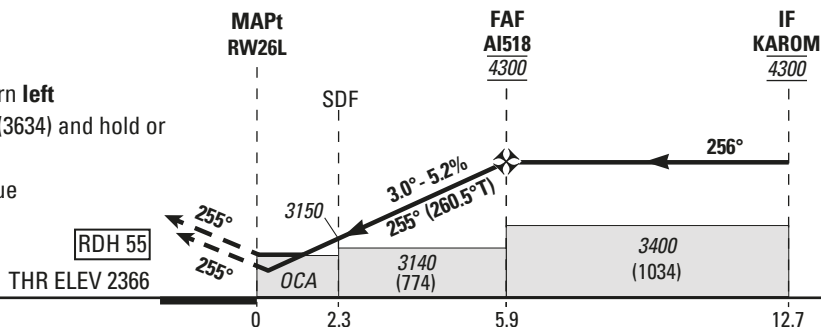

NM to THR RWY 26L

OCA (H)	A	B	C	D											
LNAV / VNAV	2600 (234)	2620 (254)	2630 (264)	2650 (284)	GS	kt	70	85	100	115	130	145	160	185	
LNAV	2720 (354)				FAF-MAPT 5.9 NM	min:s	5:03	4:10	3:32	3:05	2:43	2:27	2:13	1:55	
CIRCLING	3020 (654)		3310 (944)	3500 (1134)	Rate of descent 5.2%	ft/min	370	450	530	610	690	770	850	980	

Holding instruction

<i>Path Descriptor</i>	<i>Waypoint Identifier</i>	<i>Inbound Course °M (°T)</i>	<i>Leg Distance</i>	<i>Turn direction</i>	<i>Minimum Altitude (ft/FL)</i>	<i>Maximum Altitude (ft/FL)</i>	<i>Speed Limit (kt)</i>	<i>Magnetic Variation</i>	<i>Navigation Specification</i>
Hold	EGPIL	346 (351.0)		L	7000	14000	220	+5.0	RNAV 1
Hold	VEDAD	269 (274.0)		R	5300	8000	210	+5.0	RNAV 1

Route Description: IAC RNP RWY 26L

RNP RWY 26L											
<i>Serial Number</i>	<i>Path Descriptor</i>	<i>Waypoint Identifier</i>	<i>Fly - Over</i>	<i>Course °M (°T)</i>	<i>Magnetic Variation</i>	<i>Distance (NM)</i>	<i>Turn direction</i>	<i>Altitude (ft/FL)</i>	<i>MAX IAS (kt)</i>	<i>VPA/TCH (°/ft)</i>	<i>Navigation Accuracy (NM)</i>
10	IF	VEDAD	-	-	-	-	-	+5300	-230	-	RNP APCH
20	TF	KAROM	-	256 (260.6)	+5.0	3.5	-	@4300	-210	-	RNP APCH
10	IF	EGPIL	-	-	-	-	-	+7000	-250	-	RNP APCH
20	TF	AI526	-	346 (350.6)	+5.0	6.8	-	-		-	RNP APCH
30	TF	AI522	-	346 (350.6)	+5.0	5.0	-	-	-230	-	RNP APCH
40	TF	KAROM	-	346 (350.5)	+5.0	3.0	-	@4300	-210	-	RNP APCH
10	IF	ORDEN	-	-	-	-	-	+5300	-230	-	RNP APCH
20	TF	KAROM	-	166 (170.5)	+5.0	6.5	-	@4300	-210	-	RNP APCH
10	IF	KAROM	-	-	-	-	-	@4300	-210	-	RNP APCH
20	TF	AI518	-	256 (260.5)	+5.0	6.8	-	@4300		-	RNP APCH
30	TF	RW26L	Y	255 (260.5)	+5.0	5.9	-	@2421		-3.0/ 55	RNP APCH
40	CF	ORKED	Y	255 (260.4)	+5.0	2.4	-	-		-	RNP APCH
50	DF	TULEN	Y	-	-	-	-	+6000	-250	-	RNP APCH
60	HM	TULEN	Y	345 (350.0)	+5.0	4.5	L	-10000 +6000	-220	-	RNP 1

Aeronautical Data Tabulation: IAC RNP RWY 26L

WAYPOINT LIST		
Waypoint / Fix	Latitude	Longitude
VEDAD	31°45'52.847"N	036°19'54.051"E
KAROM	31°45'18.212"N	036°15'50.229"E
EGPIL	31°30'37.923"N	036°18'41.447"E
AI526	31°37'23.717"N	036°17'22.663"E
AI522	31°42'20.285"N	036°16'24.963"E
ORDEN	31°51'45.200"N	036°14'34.763"E
AI518	31°44'10.497"N	036°07'56.283"E
RW26L	31°43'11.593"N	036°01'06.914"E
ORKED	31°42'47.802"N	035°58'22.337"E
TULEN	31°30'50.349"N	035°46'04.661"E